


PRECAST CONCRETE STEPS & STEEL HANDRAILS FROM THE FAGENSTROM CO.

FEATURES:


- QUALITY CONSTRUCTION THAT'S MADE TO LAST
 - REINFORCED WITH WIRE MESH
 - BUILT-IN NYLON INSERTS FOR HANDRAILS
- AVAILABLE IN MULTIPLE HEIGHTS AND WIDTHS
 - PROFESSIONAL INSTALLATION

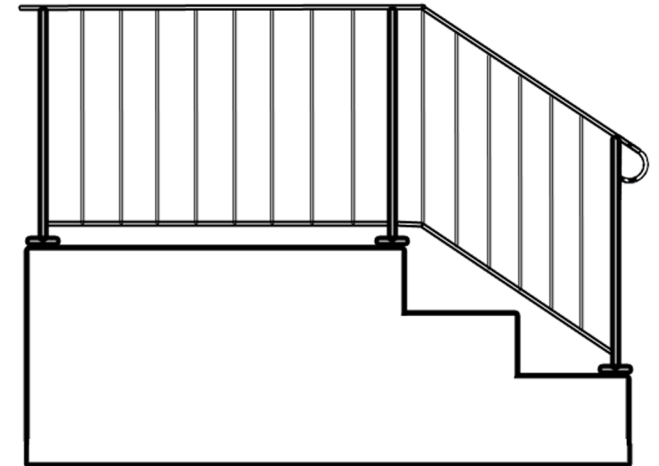

QUALITY CONCRETE PRODUCTS


INSTALLATION OPTIONS

HANDRAILS




QUALITY STEEL HANDRAILS ARE AVAILABLE FOR ALL OF OUR STEPS

PAD AND PLATE




CAN BE USED WITH ANY STEP
ESPECIALLY GOOD WHERE GROUND HAD ALREADY SETTLED
NOT RECOMMENDED FOR NEW CONSTRUCTION

PRE-POURED CONCRETE PAD

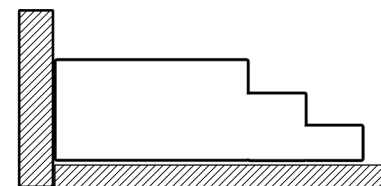


WE WILL SET THE STEP ON A PAD YOU'VE ALREADY POURED. (SEE NOTE AT THE BOTTOM OF THE PAGE)

BRACKETS

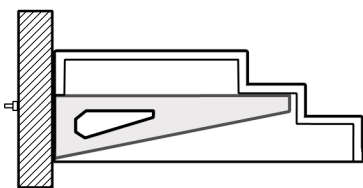


USED WITH ANY HOME WITH AT LEAST A 6" FOUNDATION

BLOCKS



RECOMMENDED FOR TRAILER HOMES OR SIMILAR TYPES OF HOUSES

SIDE MOUNT

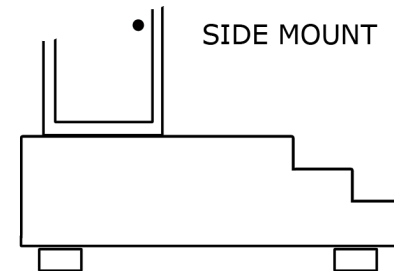

FEATURES A SOLID BACK AND CAN BE PLACED EITHER DIRECTION (4 FT WIDE ONLY)

SIZES AND DIMENSIONS





4 FT WIDE

5 FT WIDE





6 FT WIDE

4 FT SIDE MOUNT





2
RISER



3
RISER

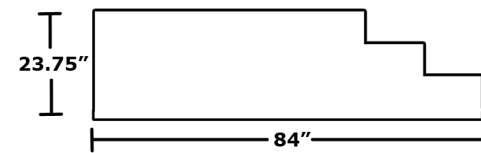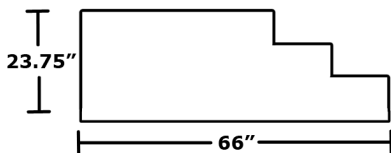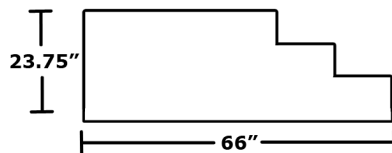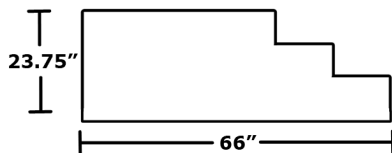

4
RISER

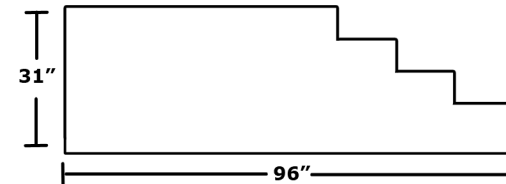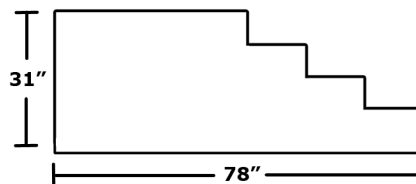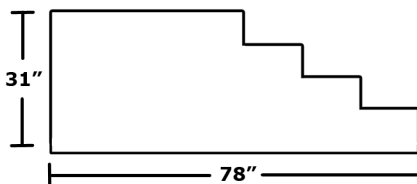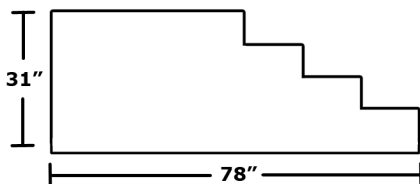

NOTE: OUR STEPS ARE POURED WITH THE BOTTOM RISER AN EXTRA 2-INCHES TALL TO ACCOMMODATE INSTALLATION BELOW GRADE. IF YOUR INSTALLATION REQUIRES THE STEP BE PLACED ABOVE GRADE, AS IS THE CASE WITH A PRE-POURED PAD, WE CAN CUSTOM POUR YOU A STEP WITHOUT THE EXTRA 2-INCHES.