

NOTES

TITLE

1000 Gallon HS-20 Rated
Sand/Oil Interceptor


DATE 10/25/23

REVISION 2.1

THE FAGENSTROM CO.

2101 NORTHWEST BYPASS
P.O. Box 2623
GREAT FALLS, MT 59403
WWW.FAGENSTROM.CO
406-761-5200



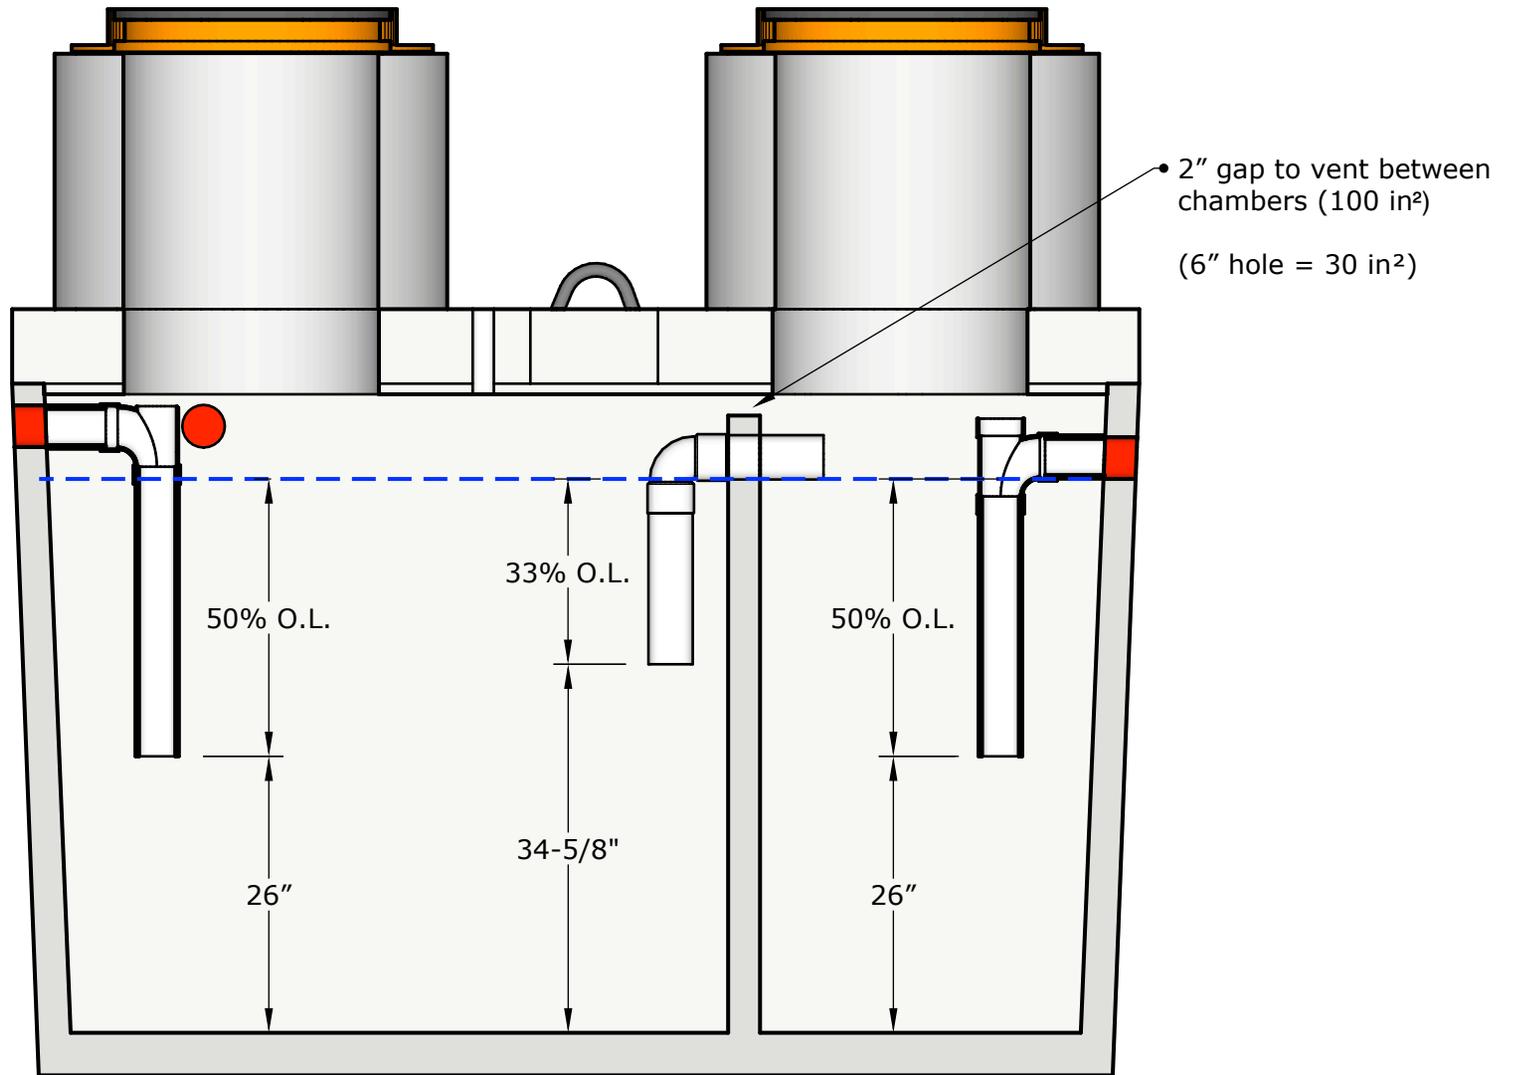

NOTES

TITLE

1000 Gallon HS-20 Rated
Sand/Oil Interceptor


DATE 10/25/23

REVISION 2.1

THE FAGENSTROM CO.

2101 NORTHWEST BYPASS
P.O. Box 2623
GREAT FALLS, MT 59403
WWW.FAGENSTROM.CO
406-761-5200



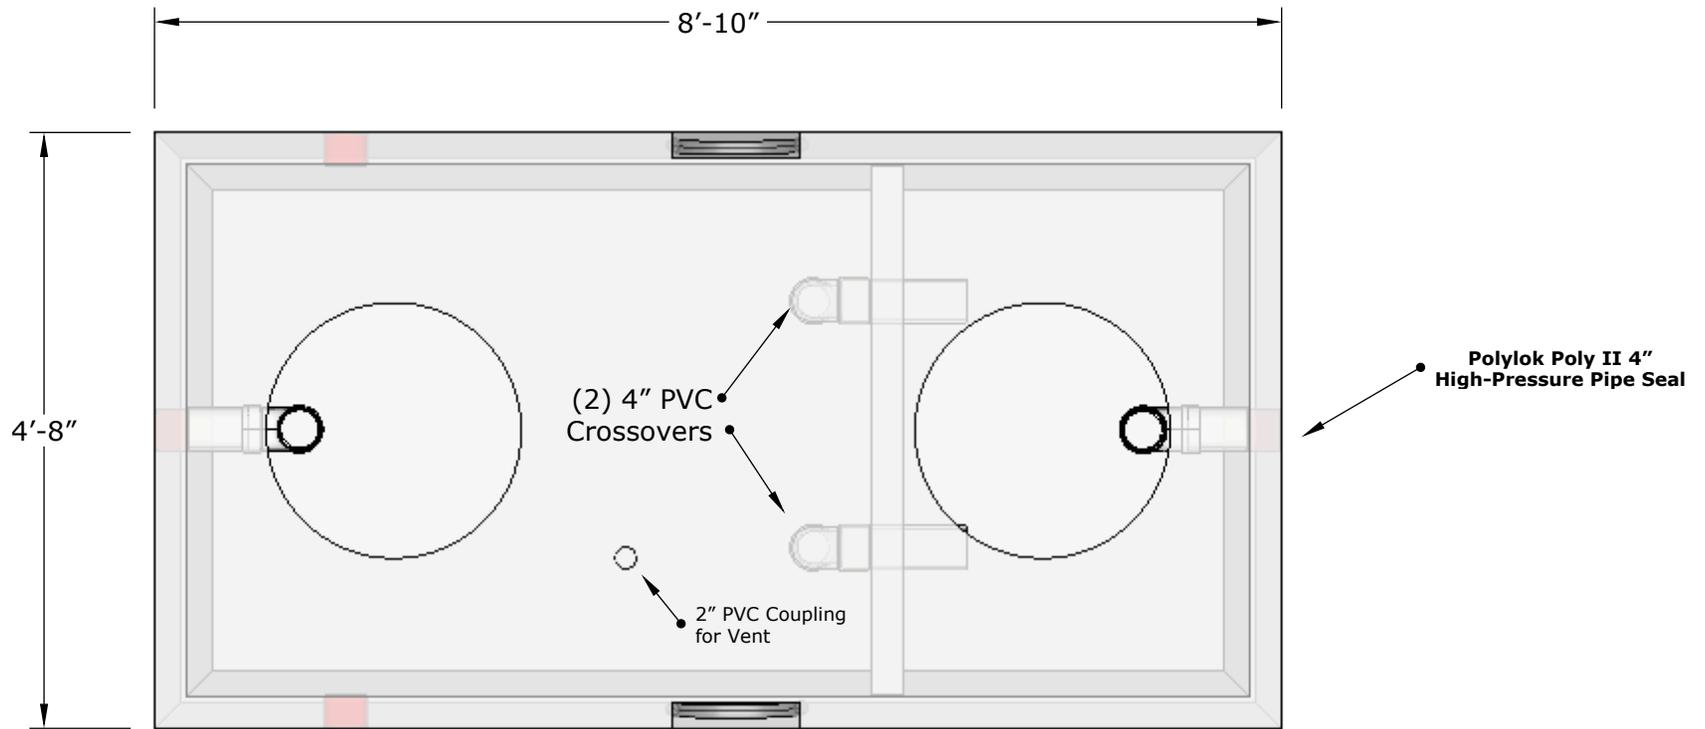

NOTES

TITLE

1000 Gallon HS-20 Rated
Sand/Oil Interceptor


DATE 10/25/23

REVISION 2.1

THE FAGENSTROM CO.

2101 NORTHWEST BYPASS
P.O. Box 2623
GREAT FALLS, MT 59403
WWW.FAGENSTROM.CO
406-761-5200



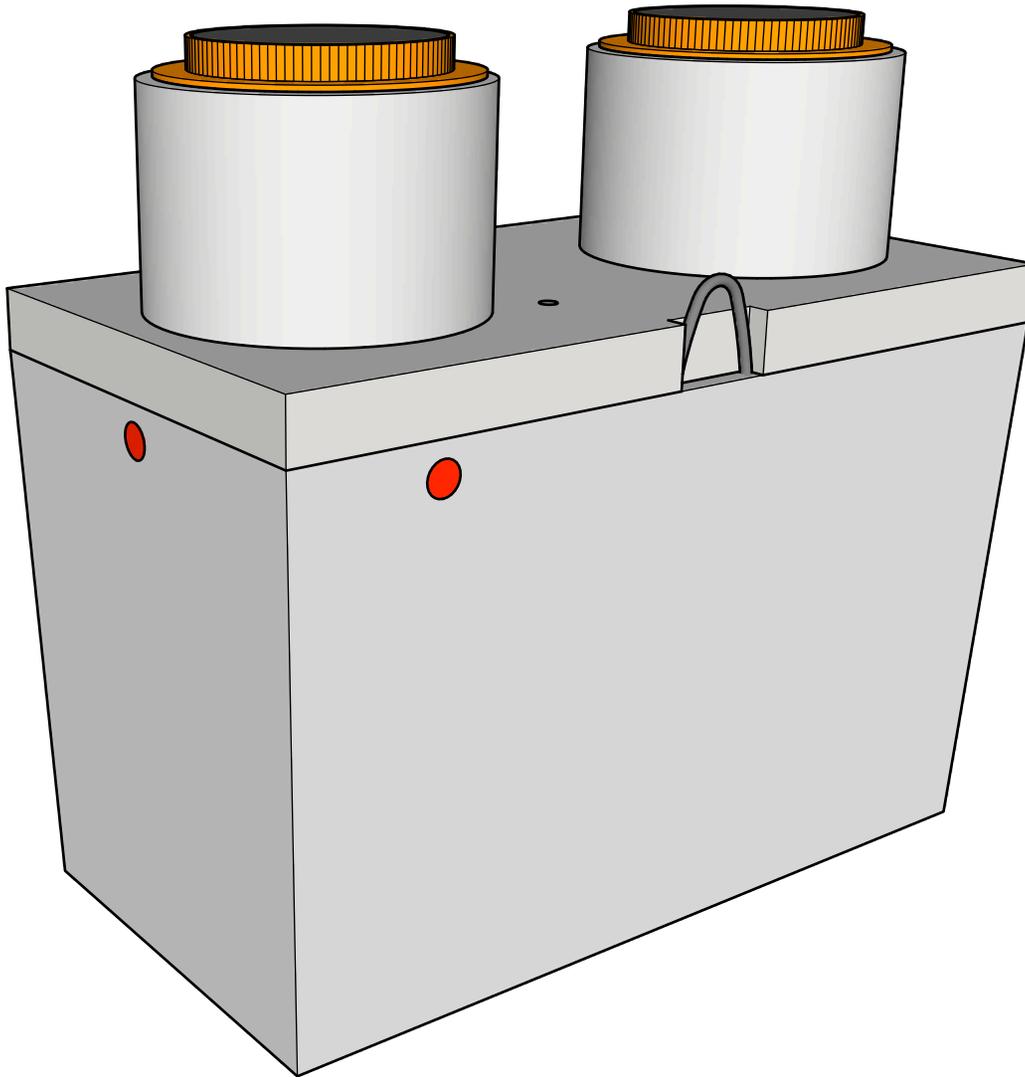

Included with the 1000 Gallon HS-20 Traffic Rated Sand/Oil Interceptor:

- All internal PVC fittings including; inlet tee, outlet tee and PVC crossovers.
- (2) East Jordan 1848ZPT APT Cast-Iron Ring and Cover (Bolt-Down and Gasketed).
- Any heavy duty concrete risers and/or riser rings needed to bring the casting to grade.**
- Press-Seal Ez-Stik 1" Butyl Joint Sealant provided for all joints.
- The inlets and outlet are cast into the walls of the tank using Polylok Poly II 4" High Pressure Pipe Seals. There is one inlet on the opposite end from the outlet as well as an inlet on each side for added flexibility. You tear out the pipe seal you wish to use and leave the others intact.

Notes:

- Max Bury Depth is 6ft.
- Tank weight is approximately 10,800 LBS.
 - Lid = 3,375 LBS
 - Bottom = 7,425 LBS
- Risers weigh approximately 645 LBS/FT.
- Consult with The Fagenstrom Co. for proper handling instructions before attempting to move the tank yourself.

** You'll need to know final elevations prior to delivery of the tank in order to have the risers and/or riser rings delivered with the tank. Risers can be picked up at a later date or delivery can be arranged for a separate fee

NOTES

TITLE

1000 Gallon HS-20 Rated
Sand/Oil Interceptor

DATE 10/25/23

REVISION 2.1

THE FAGENSTROM CO.

2101 NORTHWEST BYPASS
P.O. Box 2623
GREAT FALLS, MT 59403
WWW.FAGENSTROM.CO
406-761-5200

